

Arc H.200



Apparecchio LED di forma cilindrica alimentatore elettronico a bordo, gradi di emissione 14, 25°, 35°.

Cylindrical LED luminaire 230V, with electronic driver inside.

2 nero opaco
matt black

4 bianco opaco
matt black

139.200.14.-- 2 4
6w, 3000°K, 615lm, 102,5lm/w, CRI>90,



139.200.25.-- 2 4
6w, 3000°K, 615lm, 102,5lm/w, CRI>90,



139.200.35.-- 2 4
6w, 3000°K, 615lm, 102,5lm/w, CRI>90,



cod. 139.200.X.2700.-- per 2700°K
cod. 139.200.X.4000.-- per 4000°K

frangiluce a nido d'ape honeycomb


139.01 1 pc



schermo a croce cross baffle

139.02 1 pc



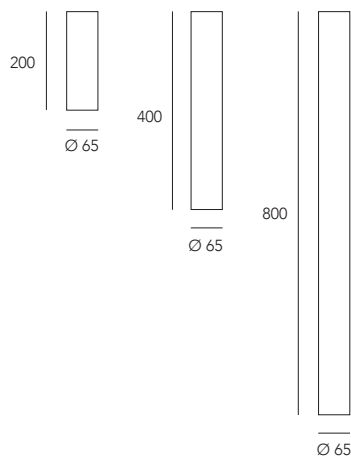

Arc H.400



Apparecchio LED di forma cilindrica 230V, alimentatore elettronico a bordo, gradi di emissione 14, 25°, 35°.
Cylindrical LED luminaire 230V, with electronic driver inside.

139.400.14.-- 2 4 
9w, 230V, 3000°K, 1200lm, 133lm/w, CRI>90,

139.400.25.-- 2 4 
9w, 230V, 3000°K, 1200lm, 133lm/w, CRI>90,

139.400.35.-- 2 4 
9w, 230V, 3000°K, 1200lm, 133lm/w, CRI>90,

cod. 139.400.X.2700.-- per 2700°K
cod. 139.400.X.4000.-- per 4000°K

Arc DALI H.400



Apparecchio LED di forma cilindrica 230V, alimentatore elettronico a bordo, gradi di emissione 14, 25°, 35°.
Cylindrical LED luminaire 230V, with electronic driver inside.

139.400.01.14.-- 2 4 
9w, 230V, 3000°K, 1200lm, 133lm/w, CRI>90,

139.400.01.25.-- 2 4 
9w, 230V, 3000°K, 1200lm, 133lm/w, CRI>90,

139.400.01.35.-- 2 4 
9w, 230V, 3000°K, 1200lm, 133lm/w, CRI>90,

cod. 139.400.01.2700.-- per 2700°K
cod. 139.400.01.4000.-- per 4000°K

Arc H.800



Apparecchio LED di forma cilindrica 230V, alimentatore elettronico a bordo, gradi di emissione 14, 25°, 35°.
Cylindrical LED luminaire 230V, with electronic driver inside.

139.800.14.-- 2 4 
9w, 230V, 3000°K, 1200lm, 133lm/w, CRI>90,

139.800.25.-- 2 4 
9w, 230V, 3000°K, 1200lm, 133lm/w, CRI>90,

139.800.35.-- 2 4 
9w, 230V, 3000°K, 1200lm, 133lm/w, CRI>90,

cod. 139.800.X.2700.-- per 2700°K
cod. 139.800.X.4000.-- per 4000°K

Arc DALI H.800



Apparecchio LED di forma cilindrica 230V, alimentatore elettronico a bordo, gradi di emissione 14, 25°, 35°.
Cylindrical LED luminaire 230V, with electronic driver inside.

139.800.01.14.-- 2 4 
9w, 230V, 3000°K, 1200lm, 133lm/w, CRI>90,

139.800.01.25.-- 2 4 
9w, 230V, 3000°K, 1200lm, 133lm/w, CRI>90,

139.800.01.35.-- 2 4 
9w, 230V, 3000°K, 1200lm, 133lm/w, CRI>90,

cod. 139.800.01.2700.-- per 2700°K
cod. 139.800.01.4000.-- per 4000°K