


# Lotus Ceiling

**CONFIGURA ONLINE**  
macrolux.store

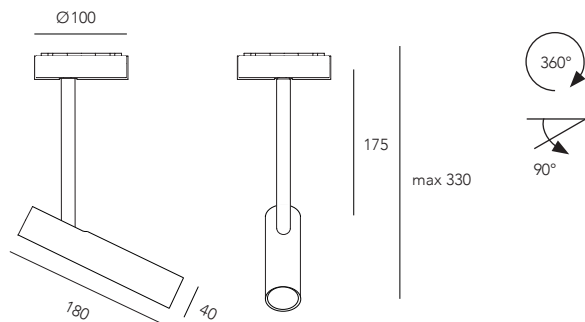

## Lotus ceiling

IP 40 CE 230V A

Proiettore LED a plafone, con alimentatore elettronico a bordo, gradi di emissione 30°, 40°, 60° orientabilità 90°.

*Projector LED for ceiling, emission degrees 30°, 40°, 60° adjustability 90°.*

**1215.1230.30.--** 2 4 86 87 96  
8,3w, 3000°K, 979lm, 118lm/w, CRI>90,



**1215.1230.40.--** 2 4 86 87 96  
8,3w, 3000°K, 979lm, 118lm/w, CRI>90,



**1215.1230.60.--** 2 4 86 87 96  
8,3w, 3000°K, 979lm, 118lm/w, CRI>90,



cod. 1215.1230.X.2700.-- per 2700°K

cod. 1215.1230.X.4000.-- per 4000°K

**2** nero opaco  
matt black

**4** bianco opaco  
matt black

**86** grigio bluastrò  
bluish Gray

**87** grigio seta  
silk Gray

**96** bronzo  
+ asta/base nero  
bronze  
+ black rod/base